

Strong framework bridge holding the head group



#### KIT WHEELS

The wheels are Ø200 mm and can be fixed at the legs by means eyebolts. Due to their conception and for the legs' inclination, are very functional and allow the machine to be easily moved if lightly lifted up by the handles.



#### STORAGE

Build to reduce at the maximum the encumbrance during the carriage and above all the storage space.

# EXPERT 700

## STONE SAWS

*Designed and made in Italy*



Art. 9700Z	
DIAMOND DISK (not included)	Ø700 mm. (int Ø25,4 mm.)
ENGINE	400V   50/60Hz 5,5Hp/4kW
ROTATION SPEED	1400 rpm.
AMPEROMETRICAL PROTECTION	10 A
MAX CUTTING LENGTH	550 mm.
MAX CUTTING DEPTH AT 90°	270 mm.
MAX CUTTING DEPTH WITH 2 RUNS	340 mm.
WORKING TABLE SIZE	515 x 520 mm.
WATER RECYCLING PUMP TYPE	S3 Type 230V 50Hz
KIT WHEELS	Standard
DIMENSION MACHINE IN SERVICE	1540x900x h. 1630 mm.
DIMENSION MACHINE IN STOCK	720x1600x h. 1080 mm.
DIMENSION 2 MACHINES ON PALLET	720x1600x h. 1800 mm.
NET WEIGHT	95 Kg.

#### APPLICATION

Built to cut bricks, proton blocks, marble blocks and all the different kind of materials for the building sector.



An acoustic signal is activated when the phase is opposite to the direction of rotation of the diamond disk (Optional).




Cutting position with sliding carriage. It works with disk from Ø650 to Ø700 mm.



Adjustment system of the cutting height with an hand wheel and relevant locking lever. Possibility to make cuts with **2 RUNS** (max depth 340 mm).

- CONTROL BOARD**
- Switch with release coil
  - Overheat protection in the event of the disk jamming
  - Mushroom-head push button to stop the machine

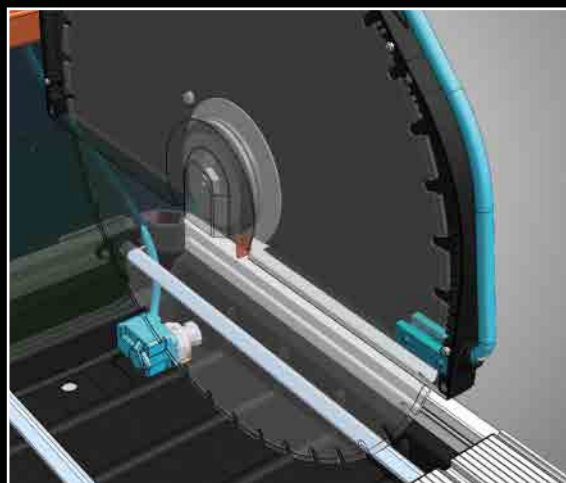

**Spray system**  
DISK'S LUBRICATION



**FastLEG**  
LEG FASTENING SYSTEM



ORIGINAL RECYCLING PUMP